



## TECHNICAL DATA

DECK HEIGHT	60MM
PLYWOOD	18MM
LOADING CAPACITY	500KG/M <sup>2</sup>
FRAME MATERIAL	EN AW 6061 T6

## ASSEMBLY STAGE

Assemble stage is a support frame suitable for indoor or outdoor use. The frame racks are available in several heights and lengths. The frames connect to the legs with a standard 4-way connection by means of a locking pin. After positioning, the frames are stable and freestanding. 10cm adjustable feet, placed in the bottom of the frames, make it possible to level the stage at an exact position.

Deck size available in 1x1m, 1.22x1.22m, 1x2m, 1.22x2.44m. Surface finish available in anti-slip, carpet and transparent.


Customized deck size is available on request.

拼装舞台是一种由面板和铝合金框架组成的舞台系统，其主要材料为防火胶合板，厚度18mm，铝框材料为EN认证的6061 T6铝合金型材，属于载重舞台，载重能力为500kg/m<sup>2</sup>，适用于音乐会，酒店，学校及政府活动等场合，舞台面板可选择的常规尺寸有1x1m, 1.22x1.22m, 1x2m, 1.22x2.44m，面板种类有防滑面、地毯面、透明面板、原木面供选择。



## LOADING TYPE

UDL	500KG/M <sup>2</sup>
POINTLOAD F1	290KG
POINTLOAD F2	180KG
POINTLOAD F3	270KG

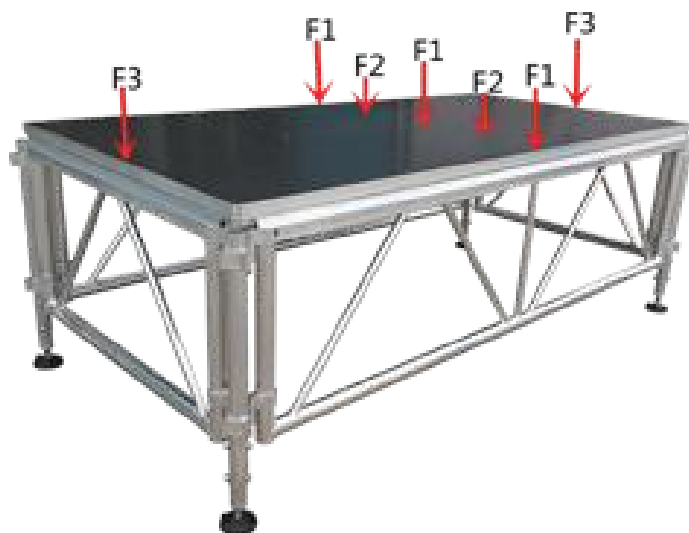

## PLATFORM SIZE

1 X 1 M  
 1.22 X 1.22 M  
 1 X 2 M  
 1.22 X 2.44 M

\*CUSTOMIZED SIZE AND SHAPE IS AVAILABLE ON REQUEST

## AVAILABLE LEGS

0.3 - 0.5M  
 0.4 - 0.6M  
 0.6 - 1.0M  
 1.0 - 1.5M  
 1.5 - 2.0M